

# XS-PCIE

## PMC to PCI Express Adapter

### Applications

- ▶ PCI Express

### Main Features

- ▶ 32-bit PMC to x1 PCI Express Adapter
- ▶ 32-bit, 33/66 MHz PCI
- ▶ 3.3V I/O PCI signalling
- ▶ RoHS

### Specifications

Form factor .....	x1 PCI Express
Dimensions .....	Short Length
PCI bus .....	32-bit, 33/66 MHz
Operating temperature ..	0 to 55°C
Storage temperature ....	-40 to 85°C
Relative humidity .....	5% to 90% non-condensing
Altitude .....	0 to 15'000 ft
Power consumption .....	0 W max


### Standards compliance

PCI Express.....	PCI Express Base Specification 1.0a
PCI .....	PCI Local Bus Specification 3.0
IEEE P1386 .....	CMC: Common Mezzanine Card
IEEE P1386.1 .....	PMC: PCI Mezzanine Card
IEEE 1149.1 .....	JTAG

### Ordering Information

XS-PCIE 32-bit PMC to PCI Adapter

XS-PCIE-T 32-bit PT5MC to PCI Adapter

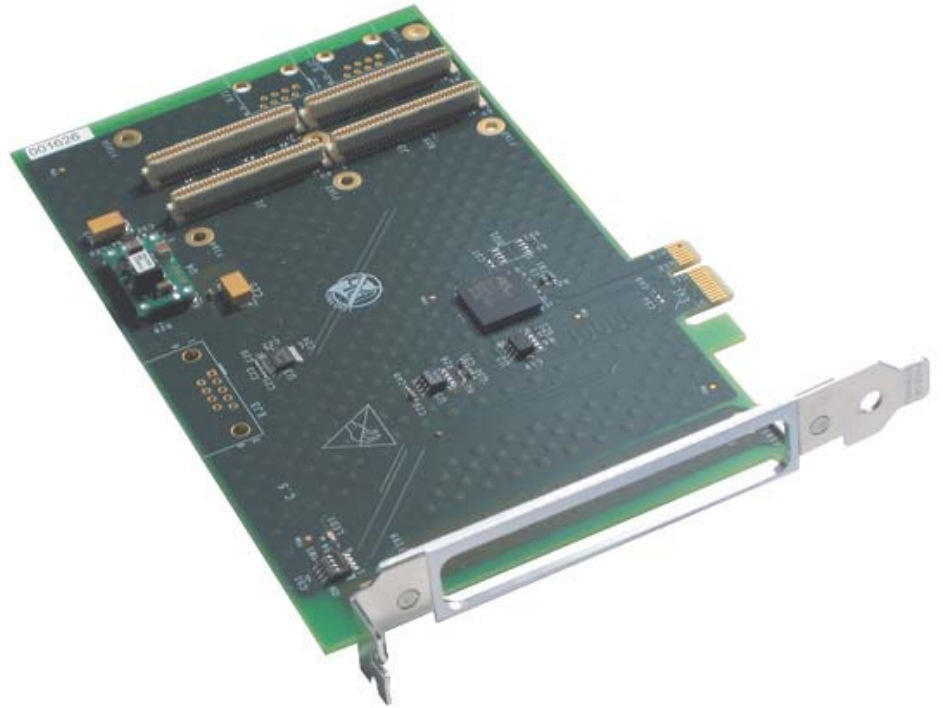

XS-PCIE permits to use IEEE P1386.1 PCI Mezzanine Cards (PMC) in a standard PCI Express environment.

XS-PCIE mechanically adapts PMC to PCI Express and bridges from a x1 PCI Express interface to a 32-bit 33/66 MHz PCI bus.

An onboard DC/DC provides 5V to the PMC from the PCI Express connector's 12V (up to 6A). All other supplies (3.3V, 5V) are provided directly to the PMC from the PCI Express supplies.

Optionnaly, XS-PCIE can be equipped with 2 RJ-45 connectors on the back of the card to support two PT5/6MC Gigabit Ethernet links and a 9-pin RS-232 connector to support the PT5/6MC UART interface.

XS-PCIE is optimized for cost, signal integrity and reliability.

Copyright © 2003-2010 Xalyo Systems, LC. All rights reserved. Printed in Switzerland. All trademarks mentioned in this document are the property of their respective owners.

Xalyo Systems  
Riant-Coteau 7  
CH 1196 Gland  
Tel: +41 22 995 00 01  
Fax: +41 22 995 00 03  
Email: [info@xalyo.com](mailto:info@xalyo.com)  
Web: [www.xalyo.com](http://www.xalyo.com)

XALYO SYSTEMS